



# COLORTONE



Recycled Content\*

Intelligibility

COLORTONE DUNE	CARRARA (CA)	PLATINIUM (PN)	BLUE MOUNTAIN (BT)
<b>Board</b>			
600 x 600 x 15 mm	9095 MCA	9095 MPN	9095 MBT
600 x 1200 x 15 mm	9090 MCA	9090 MPN	9090 MBT
<b>Tegular</b>			
600 x 600 x 15 mm	9163 MCA	9163 MPN	9163 MB
<b>MicroLook</b>			
600 x 600 x 15 mm	9113 MCA	9113 MPN	9113 MBT

COLORTONE NEEVA	BLACK (BK)	CEMENT (CG)	NAVY (NY)	METAL (MT)	CARRARA (CA)	PERL (PF)	AMBER (AB)	JADE (JA)
<b>Board</b>								
600 x 600 x 15 mm	2695 MBK	2695 MCG	2695 MNY	2695 MMT	2695 MCA	2695 MPF	2695 MAB	2695 MJA
625 x 625 x 18 mm	2404 DBK	2404 DCG	2404 DNY	2404 DMT	2404 DCA	2404 DPF	2404 DAB	2404 DJA
600 x 1200 x 15 mm	2696 MBK	2696 MCG	2696 MNY	2696 MMT	2696 MCA	2696 MPF	2696 MAB	2696 MJA
625 x 1250 x 18 mm	2405 DBK	2405 DCG	2405 DNY	2405 DMT	2405 DCA	2405 DPF	2405 DAB	2405 DJA



COLORTONE DUNE - Colours: Carrara (CA), Platinum (PN), Blue Mountain (BT).  
COLORTONE NEEVA - Colours: Black (BK), Cement (CG), Navy (NY), Metal (MT), Perl (PF), Carrara (CA), Amber (AB), Jade (JA).




Note: Trulok Prelude suspension systems are available in following standard colours: Carrara (CA), Black (BK), Silver Grey RAL9006 (SG), Brass (BS), Chrome (CE), White RAL9010 (WR).  
A choice of over 180 RAL colours are available as a special order.



EN ISO 354 & EN ISO 11654

$\alpha_w$	NRC	125	250	500	1000	2000	4000	Hz	$\alpha_p$
<b>COLORTONE DUNE</b>									
<b>0.55</b>	0.55	0.40	0.40	0.50	0.60	0.55	0.45		
<b>Sound Absorption Class = D</b>									
• COLORTONE NEEVA (Board 15 mm)									
<b>1.00</b>	0.95	0.40	0.90	1.00	0.90	1.00	1.00		
• COLORTONE NEEVA (Board 18 mm)									
<b>1.00</b>	0.95	0.40	0.85	1.00	0.90	1.00	0.95		
<b>Sound Absorption Class = A</b>									

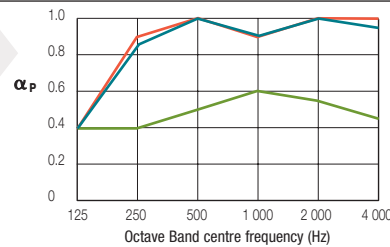

EN 20140-9 & EN 717-1

<b>Dncw</b>
<b>35 dB</b> (COLORTONE DUNE)
<b>24 dB</b> (COLORTONE NEEVA 18 mm)



EN ISO 140-3 & EN ISO 717-1

<b>Rw</b>
<b>17 dB</b> (COLORTONE DUNE)
<b>7 dB</b> (COLORTONE NEEVA)



EN 13501-1

EEA	Euroclass A2-s1, d0 (COLORTONE DUNE)
	Euroclass A1 (COLORTONE NEEVA Black, Navy, Perl, Carrara, Amber, Jade)

Euroclass A2-s1,d0 (COLORTONE NEEVA Cement)
Euroclass A2-s2,d0 (COLORTONE NEEVA Metal)



EN 12667 & ISO 8301

$\lambda = 0.06 \text{ W/m K}$  (COLORTONE DUNE)  
 $\lambda = 0.033 \text{ W/m K}$  (COLORTONE NEEVA Board)



95 % RH



COLORTONE DUNE  $\approx 3.9 \text{ kg/m}^2$   
COLORTONE NEEVA (Board 15 mm)  $\approx 1.20 \text{ kg/m}^2$   
COLORTONE NEEVA (Board 18 mm)  $\approx 1.26 \text{ kg/m}^2$

\*Recycled Content: 48% COLORTONE DUNE - 20% COLORTONE NEEVA



- Please contact our Internal Technical Sales Group for further details.
- Pour de plus amples informations merci de contacter notre Service Information Plafonds.
- Weitere Informationen erhalten Sie von unserem Kundenservice. Änderungen vorbehalten.
- Voor meer informatie kunt u contact opnemen met Market Service Center.
- Per ulteriori dettagli consultare il nostro Ufficio Commerciale.
- Para más detalles, por favor, contacte con el Servicio de Información de Techos.
- W razie dodatkowych pytań prosimy kontaktować się z biurem Armstrong w Warszawie.
- За более подробной информацией обращайтесь пожалуйста в представительство компании Армстронг.

[www.armstrong.eu](http://www.armstrong.eu)

